

Velocity Bunching Studies at FLASH

Bolko Beutner, DESY
FLASH Seminar 4.12.2007

At low beam energies ~ 5 MeV electron velocities are not independent of the particle energy



\Rightarrow correlated energy spread \Leftrightarrow velocity spread

\Rightarrow bunch compression without chicanes


First cavity of ACC1 is operated at the zero crossing (-90deg off-crest)

\Rightarrow linear correlated energy spread

Bunching stops in the second cavity since the energy increases and relativistic velocities are reached.

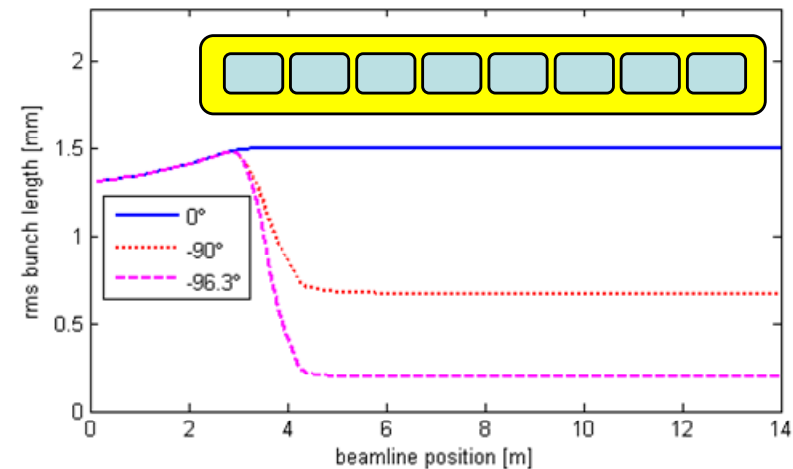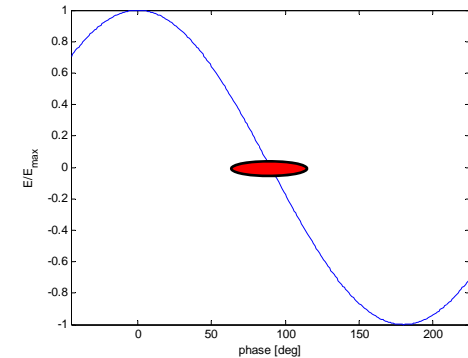

The last cavities in the module can be used to adjust the correlated energy spread.

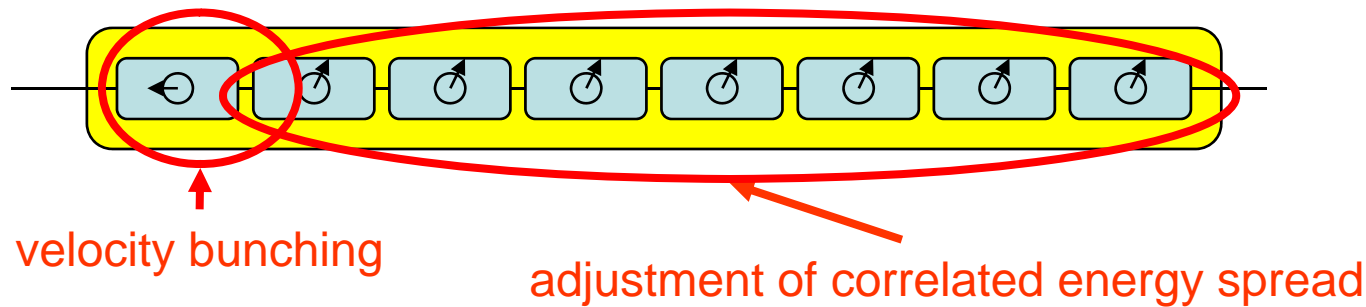

Velocity bunching is an additional “knob” to optimise the bunch compression system.


Studies on microbunch instabilities are possible with additional compression.

J.P. Carniero (2004) : First experiments at FLASH


DATA
NIGHT SHIFT
15/05/2004

SIGNAL (-90 deg)


Pyro detector / No velocity buncing

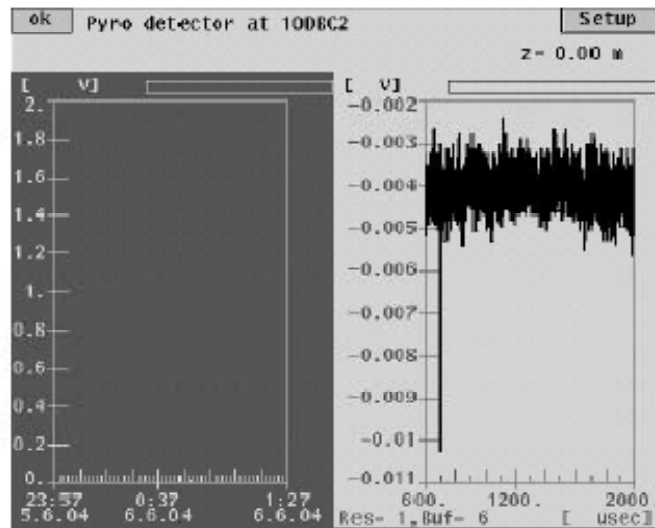


Pyro detector / With velocity buncing

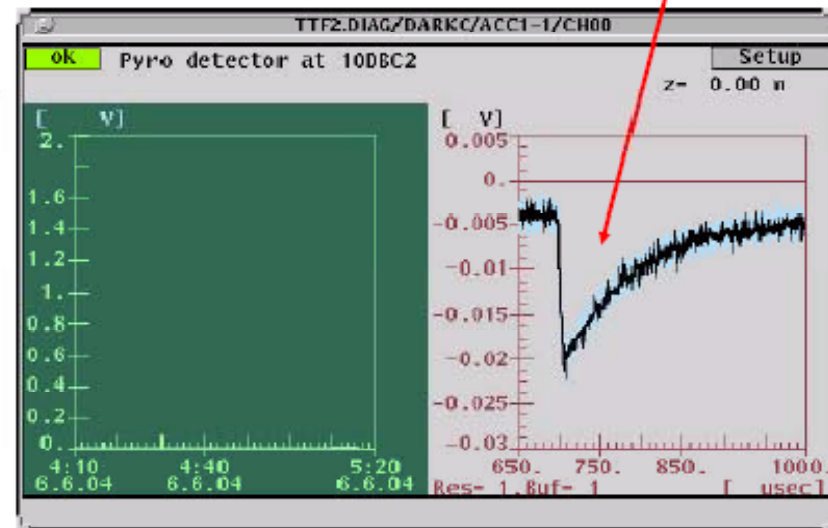


- Reduction of the energy gain of ACC1
- Modifications of the ACC1.C1 phase offset relative to the phase offset of the whole module ACC1.C1-C8 (up to about 100deg)
- Indirect measurements of compression using the energy spread in BC2 with ACC1.C2-C8 off-crest
- Pyro detector compression measurements of the DBC2 diffraction radiator or TOSYLAB
- Measurements of bunch length vs. ACC1.C1 phase with the streak camera at TOSYLAB using synchrotron radiation from BC2
- Measurements of the emittance in DBC2 FODO section
- Bunch length measurements at LOLA
- CSR microbunch instability studies

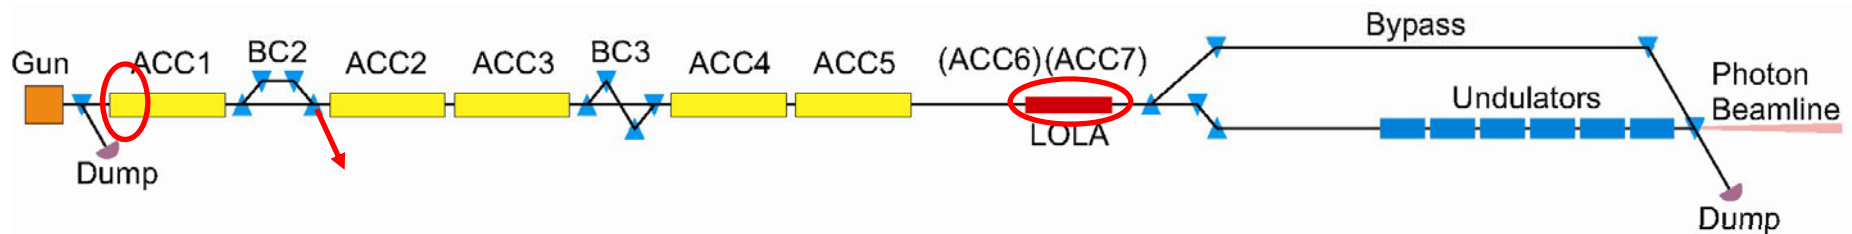

ASTRA simulations based on J.P. Carnieros files
($q=0.5\text{nC}$; 10k particles)

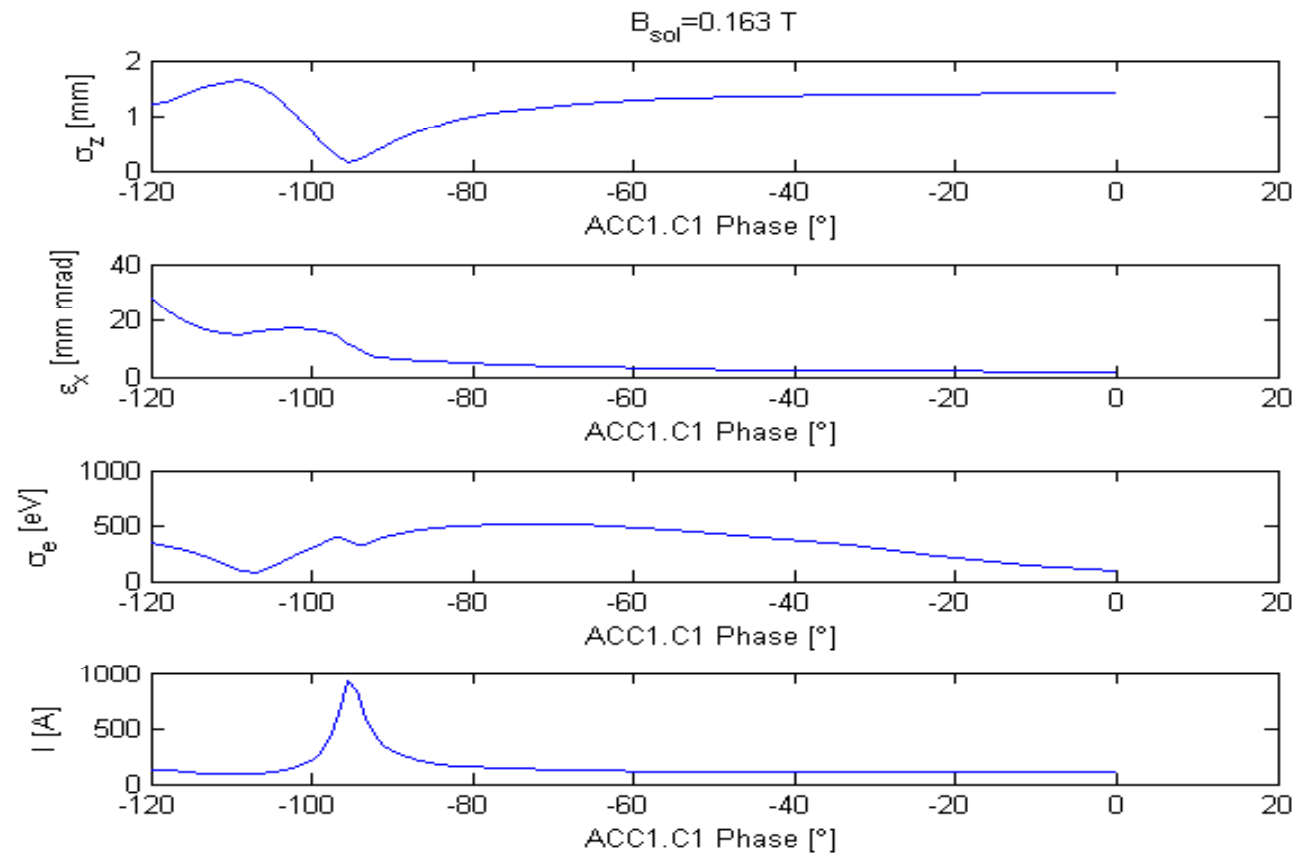


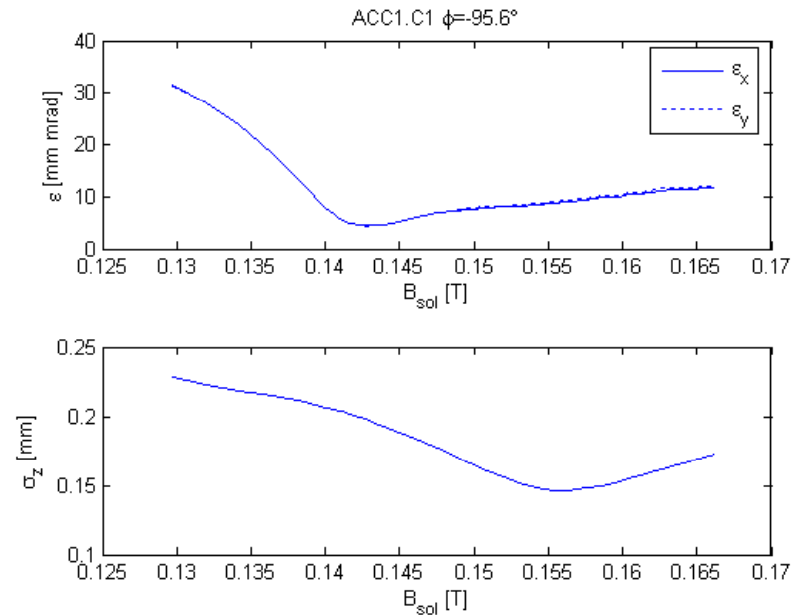

At full compression emittance after solenoid optimisation is 4.5mm mrad after ACC1.



Nonlinear compression

longitudinal Space Charge forces

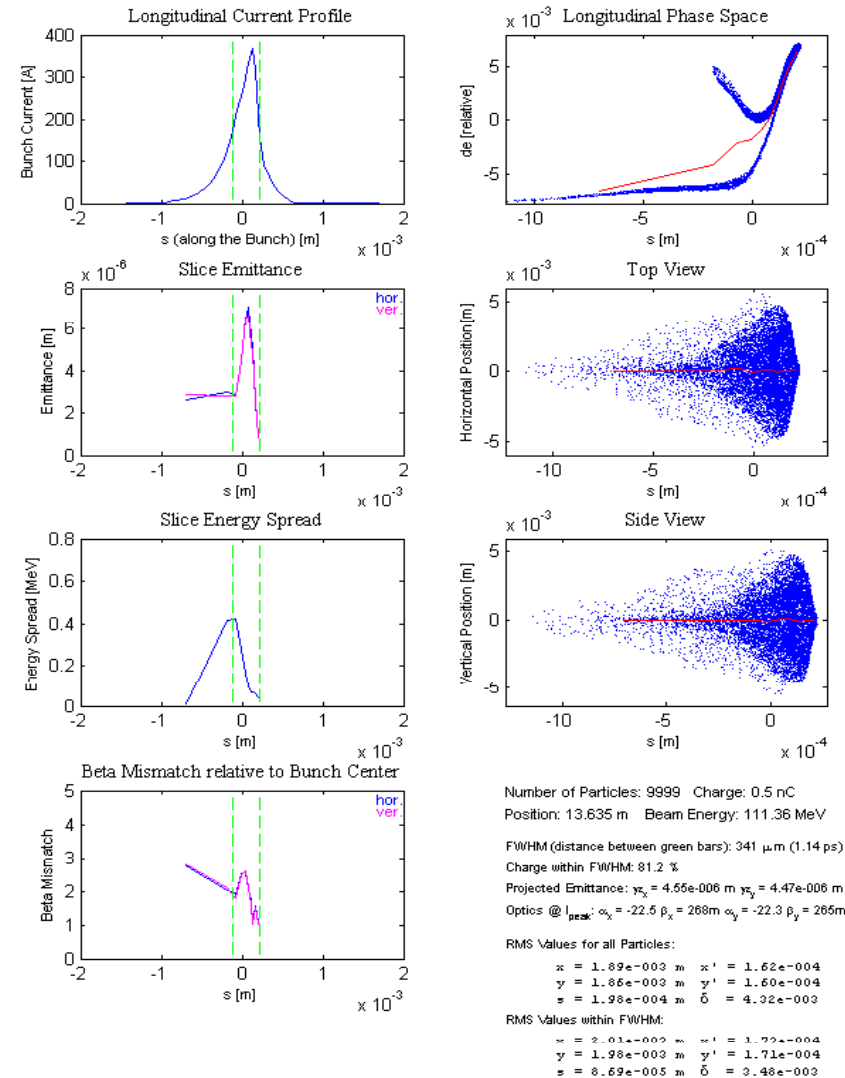


ACC1 Phase Manipulations

- 3-Stab waveguide tuners are used to shift phase offsets of single cavities
- Tuner positions are taken from pre-measured curves
- Q of the cavities are kept within reasonable limits by tuning of the middle stab position
- Final phase offsets differ slightly from the intended ones but are measured with the RF probes

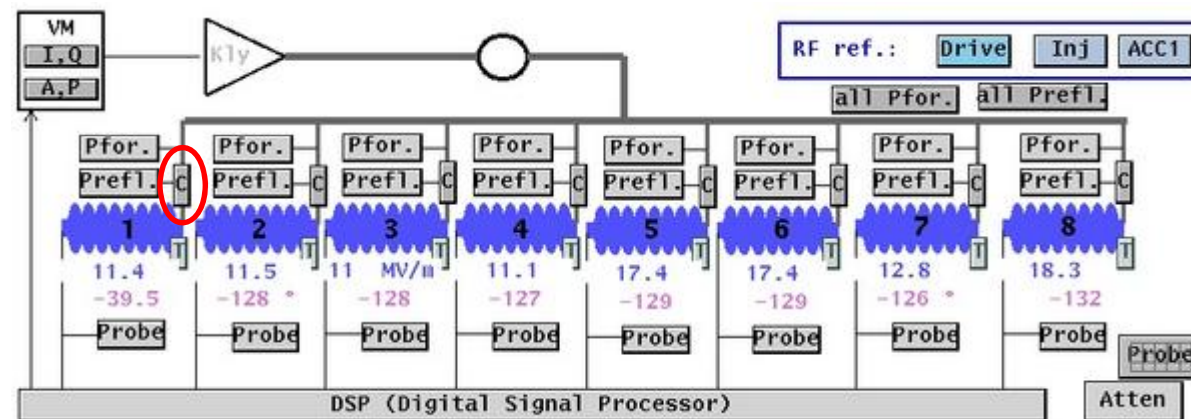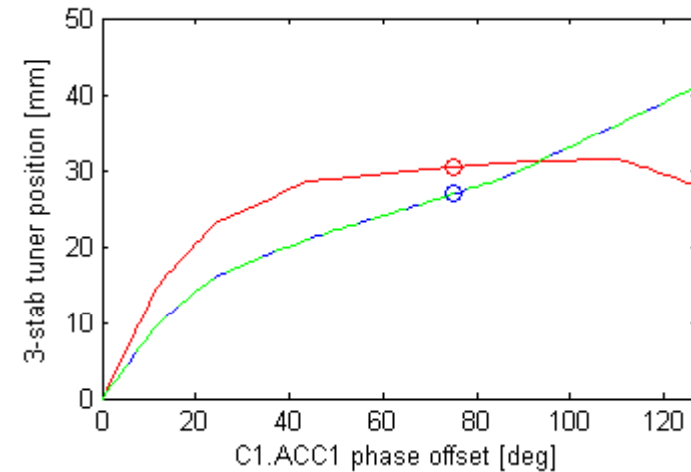



The cavities C2-C8.ACC1 are set off-crest to map the bunch length to the correlated energy spread.
 Energy spread measurements on the screen (3BC2) in a dispersive section gives indirect data on bunch length.
 A minimum in bunch length corresponds almost to the minimum in energy spread
 (initial correlated energy spread from the gun shifts the minimum slightly)

Simulations

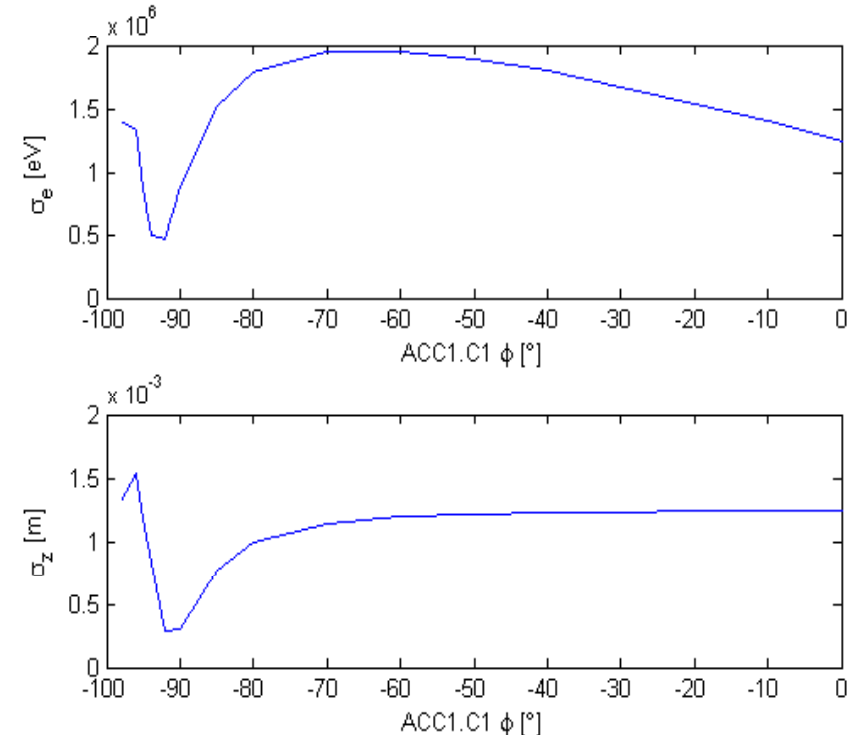


Scan on C1.ACC1 phase offset
while the phase of C2-
C8.ACC1 is set
+5 deg off crest

Spot size on the 3BC2 screen is
used as a measure for the
energy spread

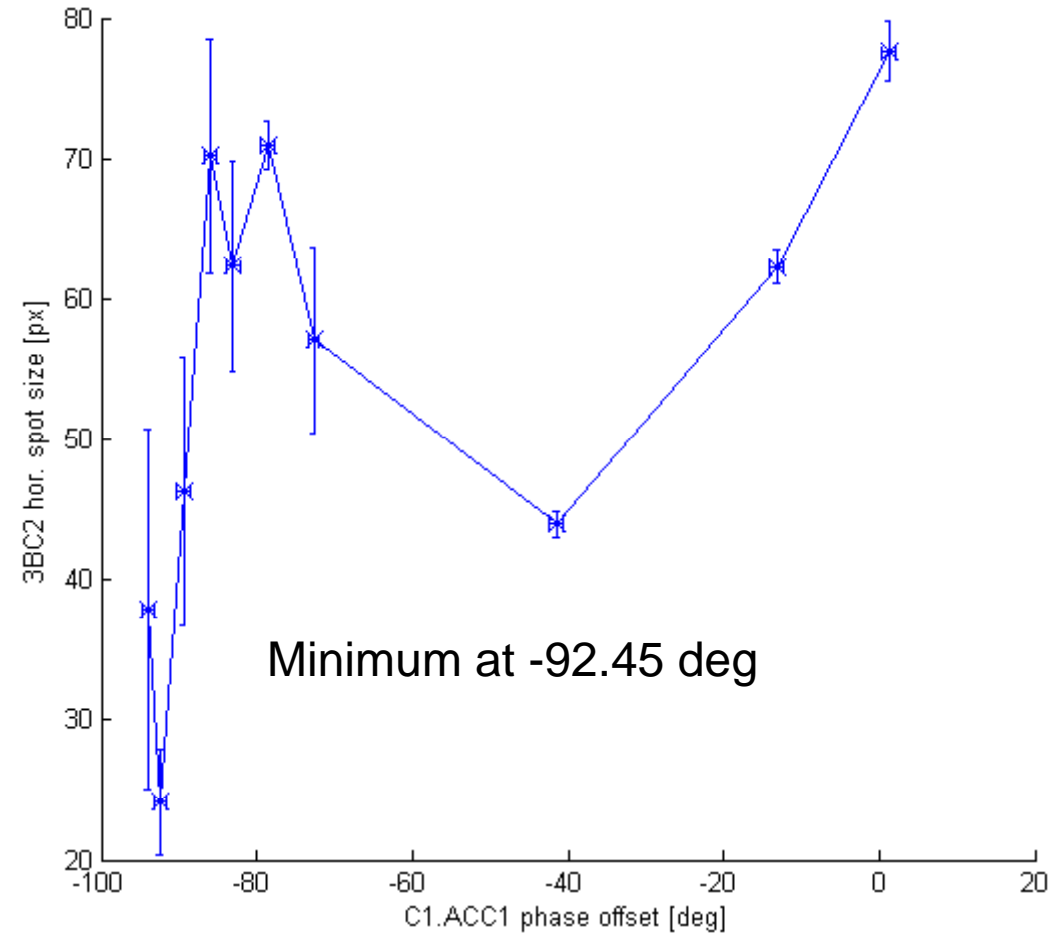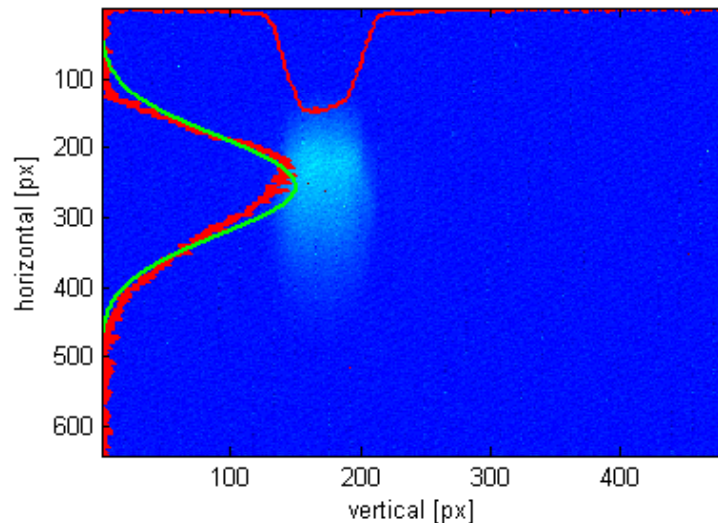

Compression Monitor Measurements

A pyro detector measuring the diffraction radiation at 9DBC2 is used to measure bunch compression


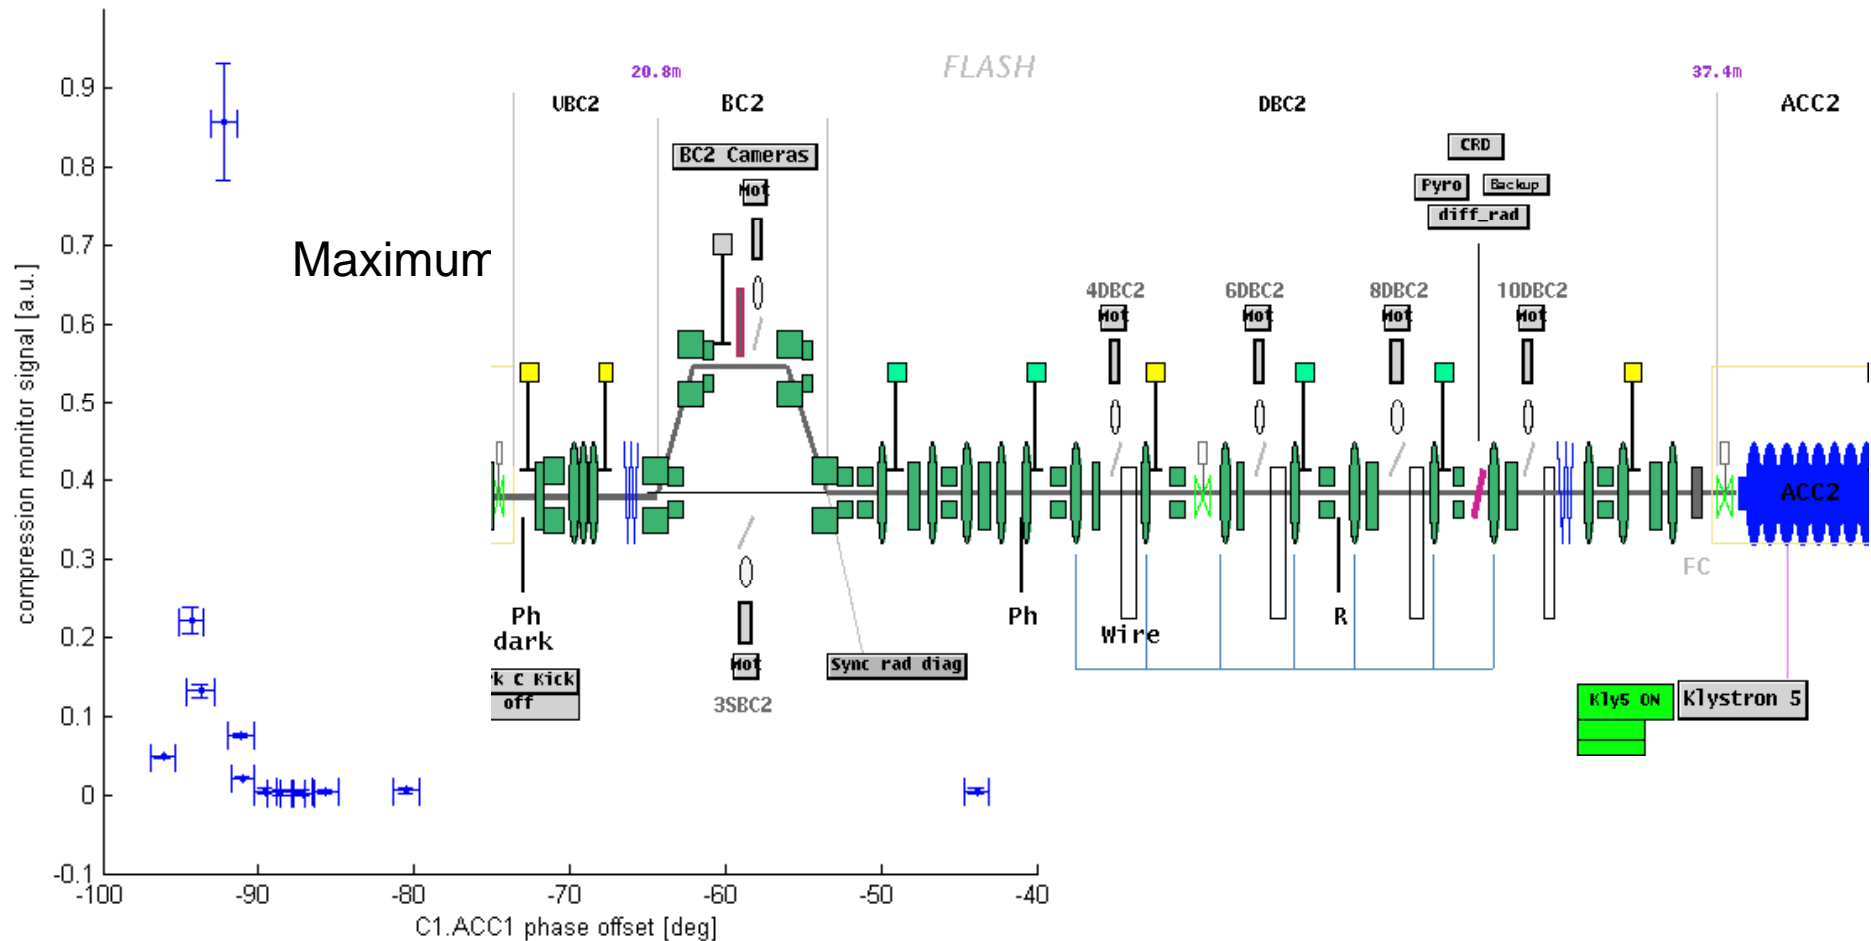



Streak Camera

Synchrotron radiation from the 4th dipole in BC2 is transported to TOSYLAB via an optical beamline.

A Hamamatsu streak camera is used to measure synchrotron radiation pulse length and thus the bunch length.


A $540 \text{ nm} \pm 40 \text{ nm}$ wavelength filter was used suppress resolution limitation by optical dispersion. Resolution limit expected around 1 ps.

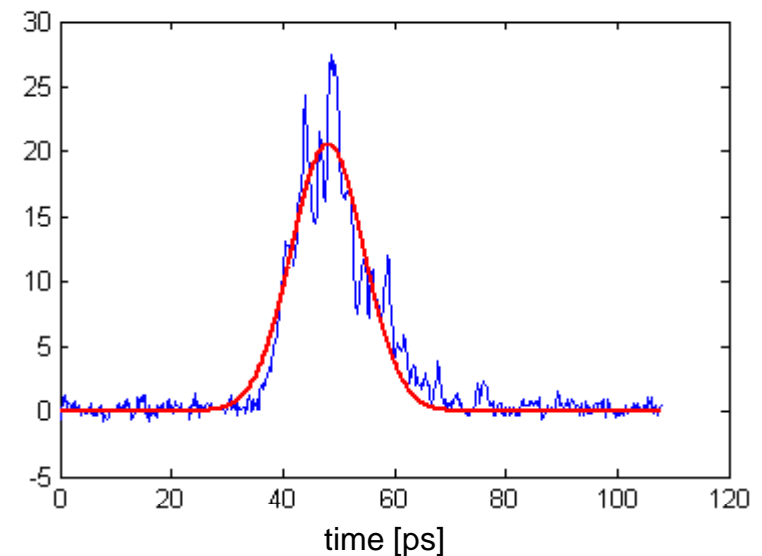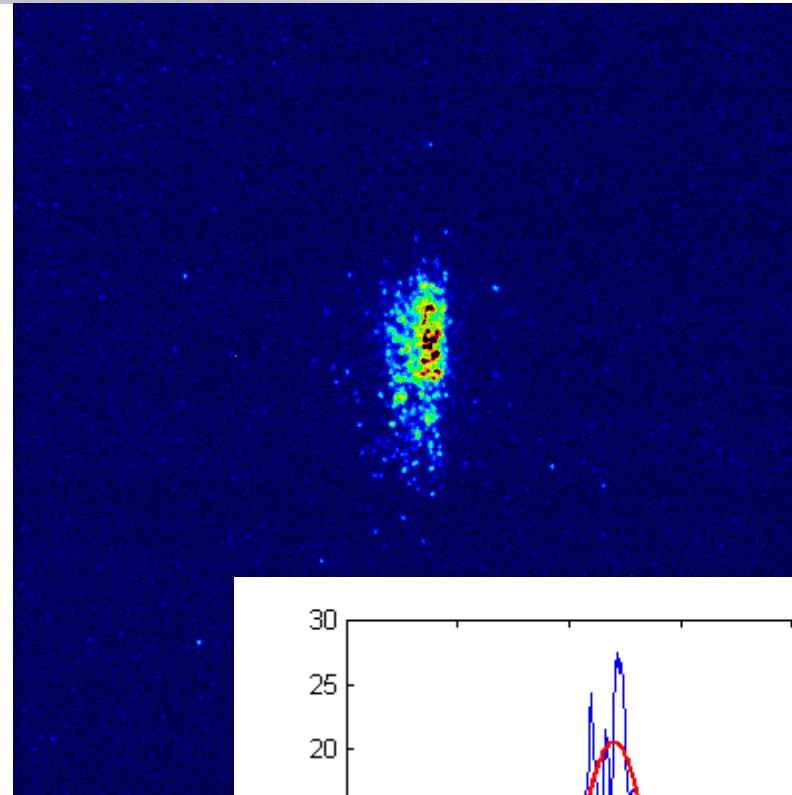

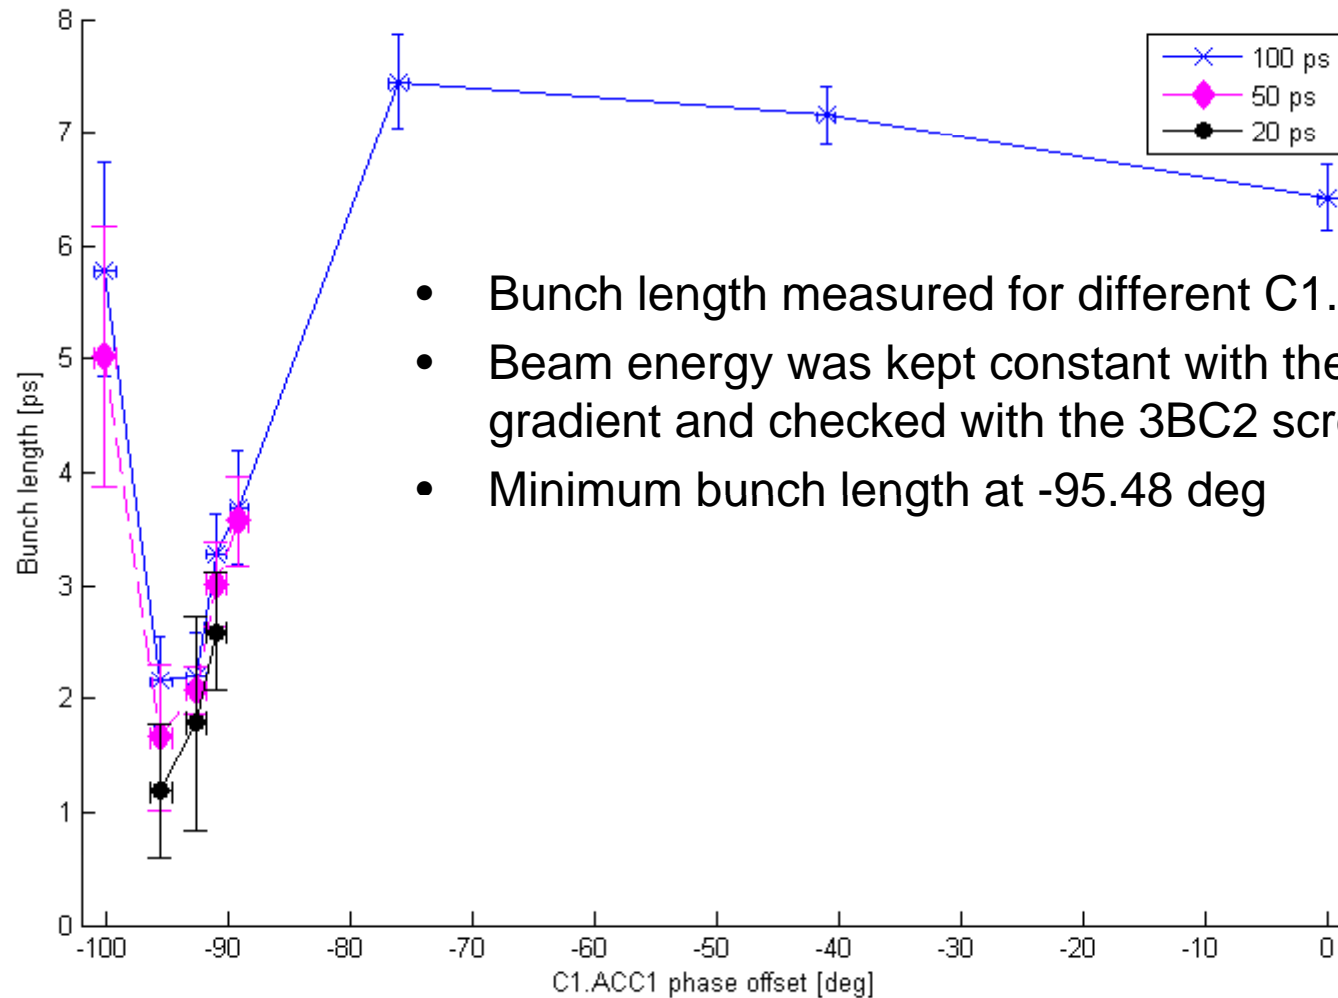


- Bunch length measured for different C1.ACC1 phase offsets
- Beam energy was kept constant with the total ACC1 gradient and checked with the 3BC2 screen
- Minimum bunch length at -95.48 deg

Streak Camera Measurements – BC Compression

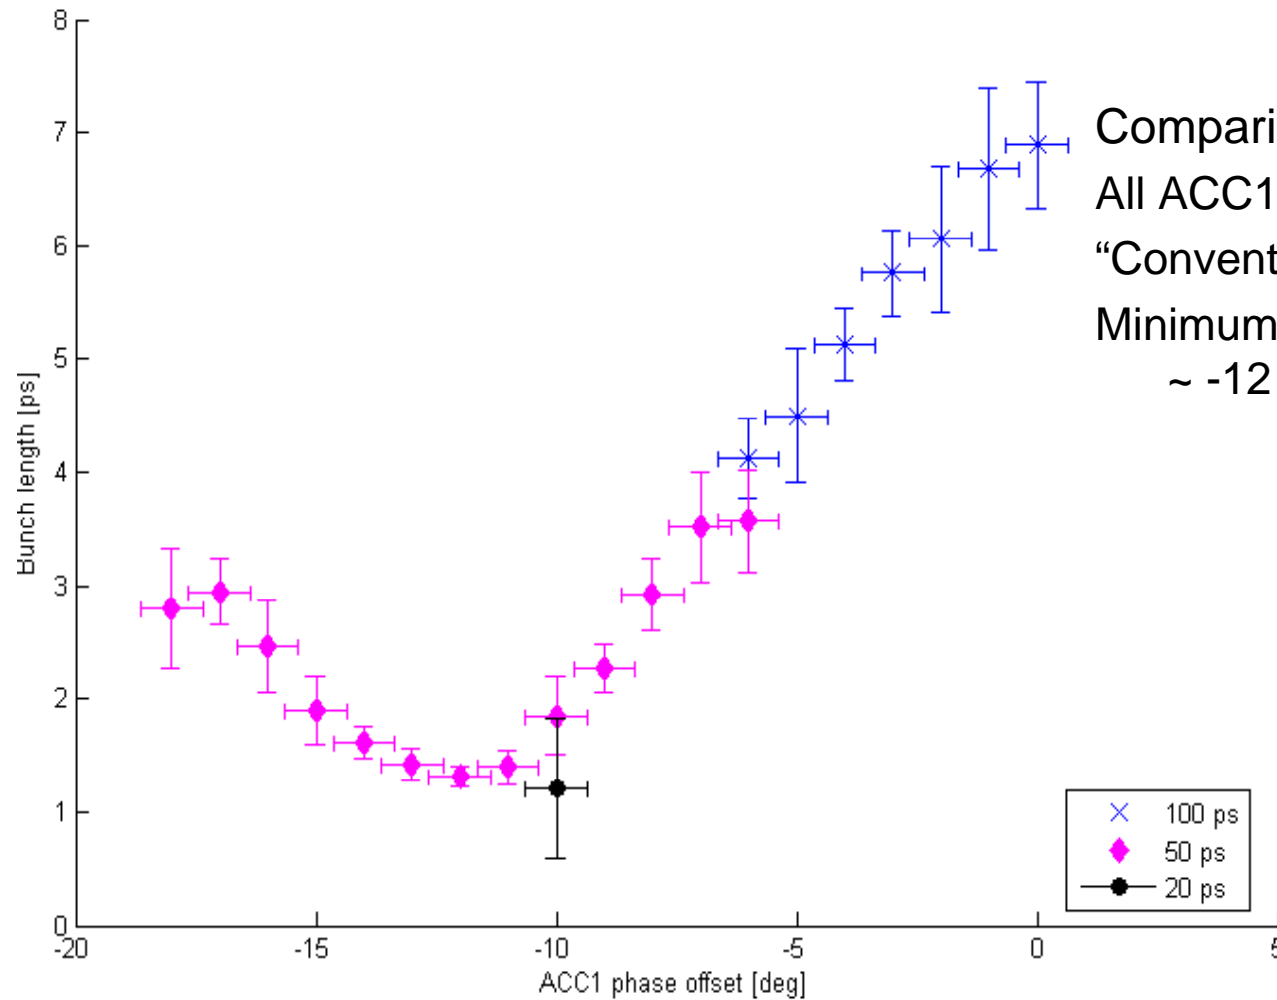


Comparison Measurement:
All ACC1 cavities are in phase
“Conventional” compression in BC2
Minimum bunch length at
~ -12 deg


Emittance Measurements



- Emittance is measured in the DBC2 FODO section.
- Four-Screen method was used.
- Optics matching for each emittance measurement

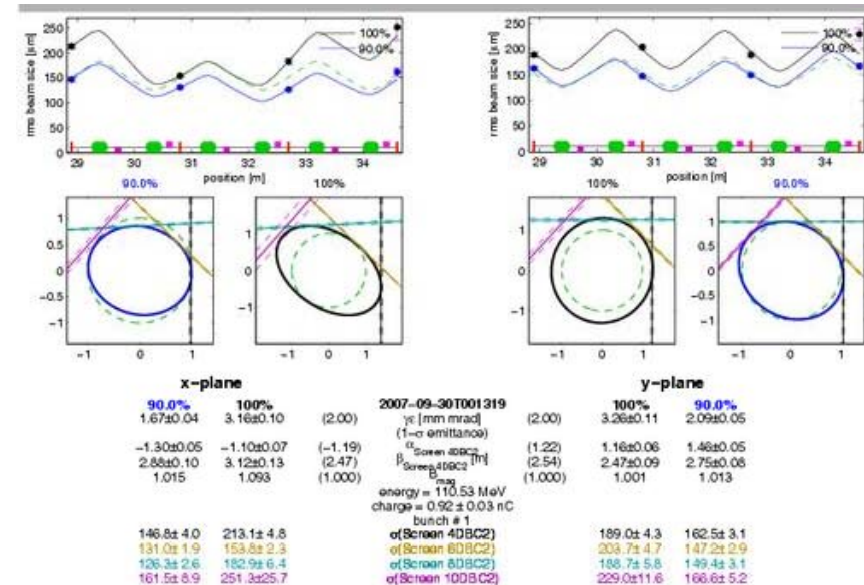


On-crest


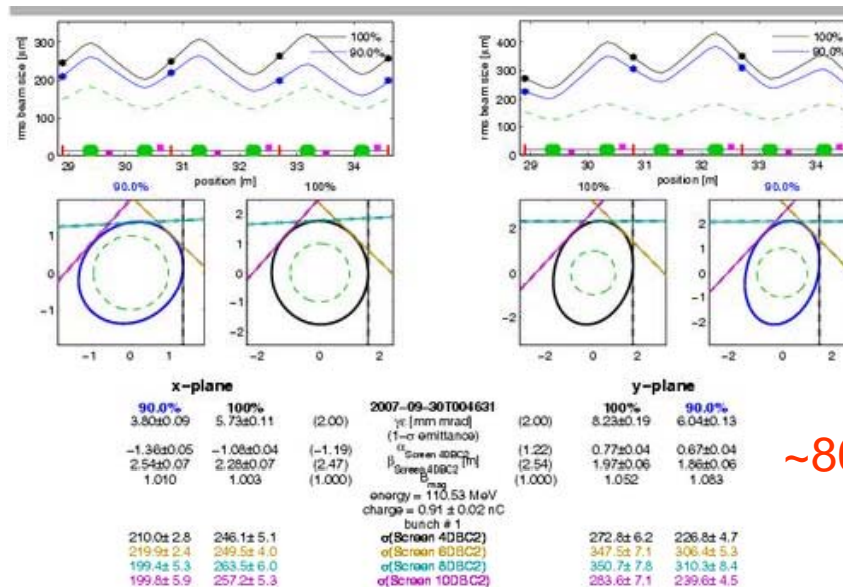


~86.5 deg

- Emittance measured as function of the main solenoid
- Asymmetry between the horizontal and vertical emittance
- Solenoid current of 288.5 A was chosen as a good working point

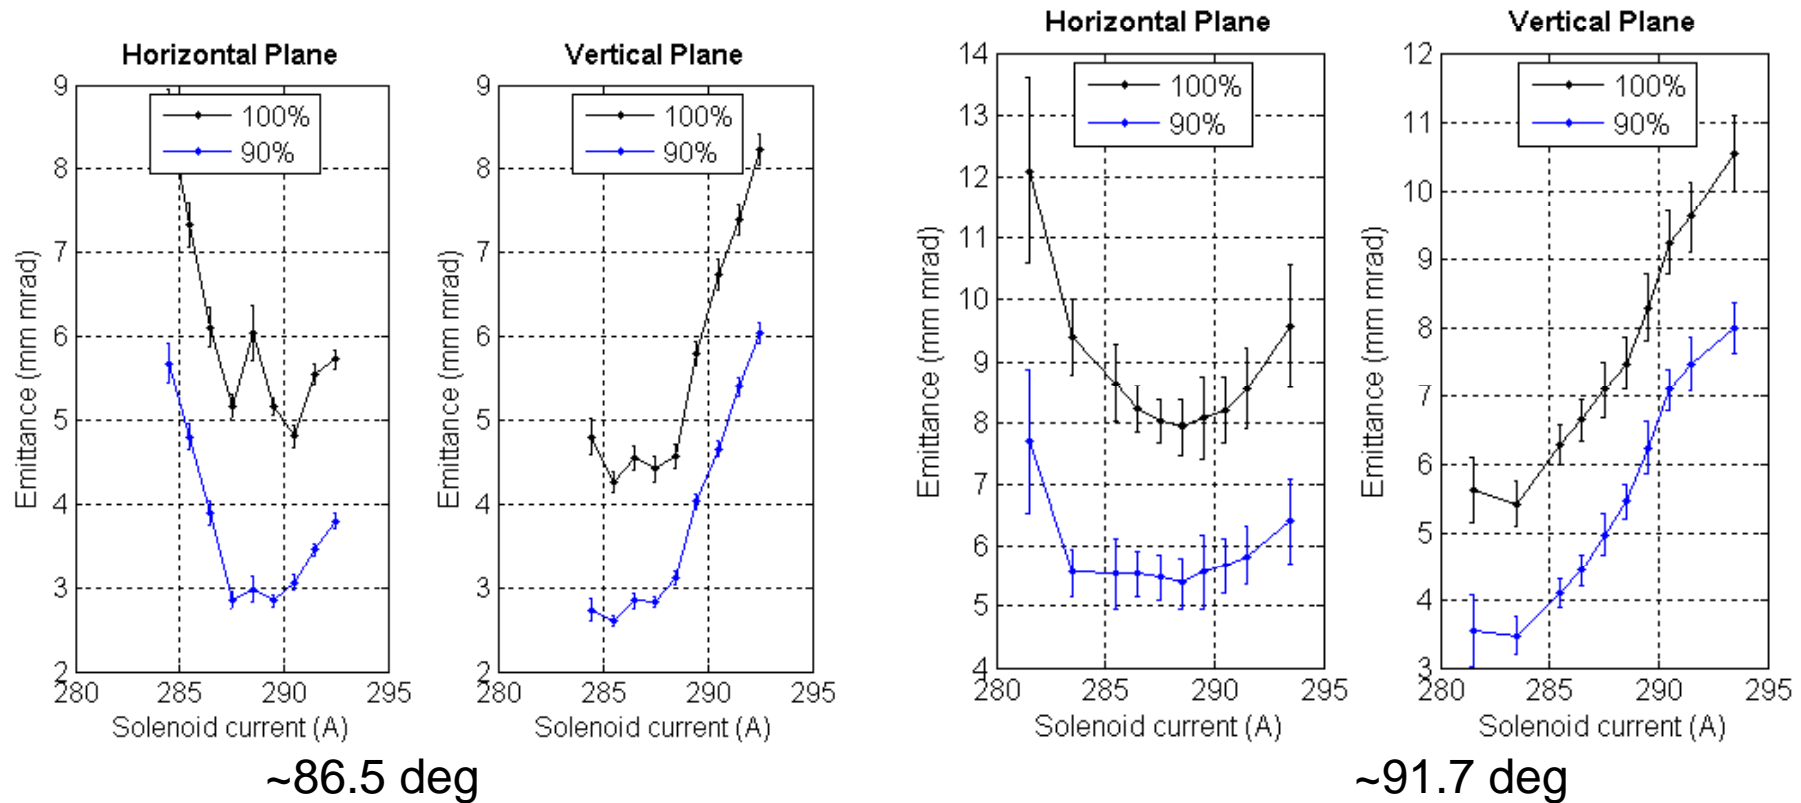


- Emittance increase in the phase range of beam compression
- Beam mismatch at phase offset of -96 deg

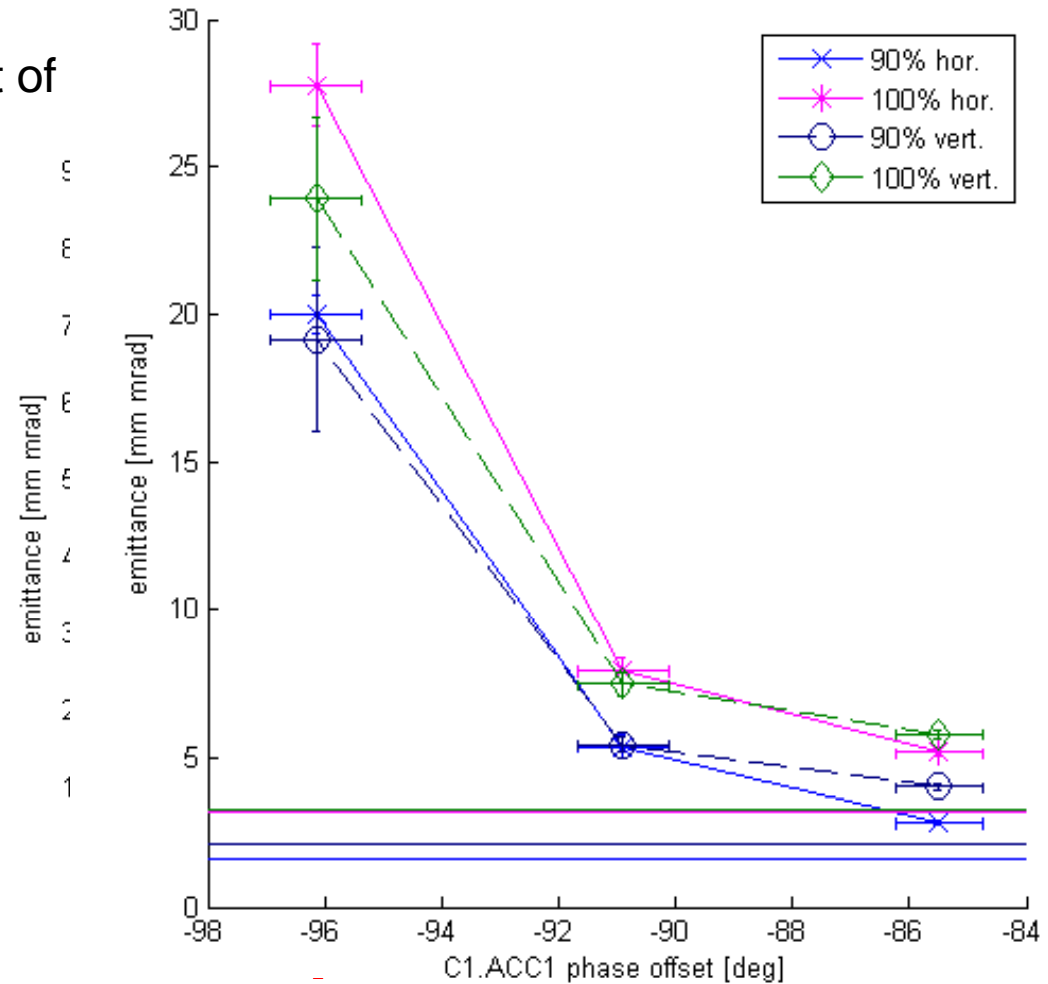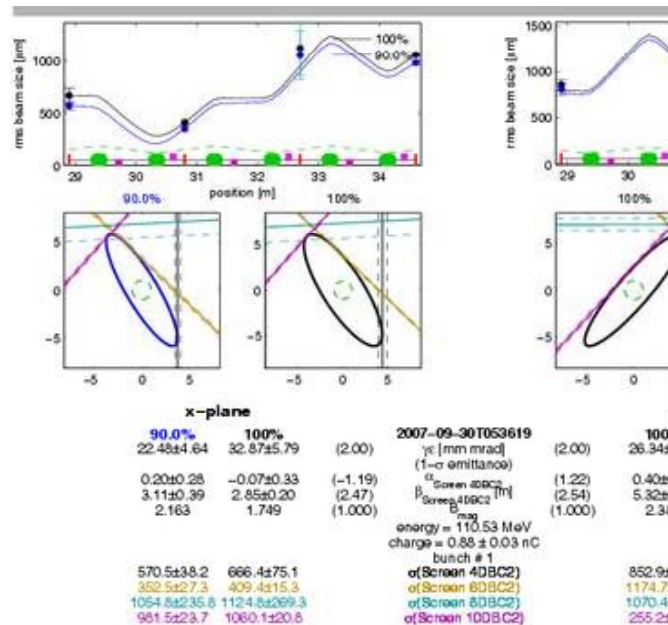


On Crest

Comparison with Simulations

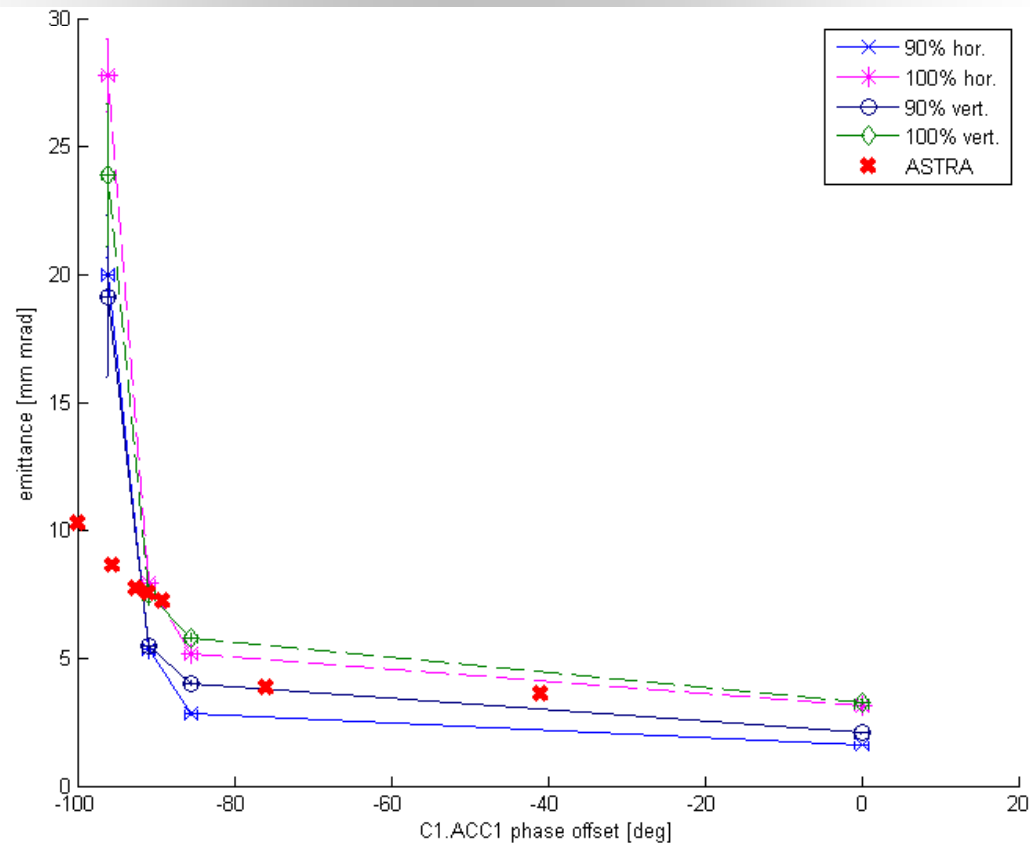


Measured emittance at phase offsets around -90 to -100 degrees disagrees with the simulations – possible reasons:

- CSR interactions and wake fields are not included in the simulations
- Beam mismatch at -96 deg phase offset
=> emittance measurement?

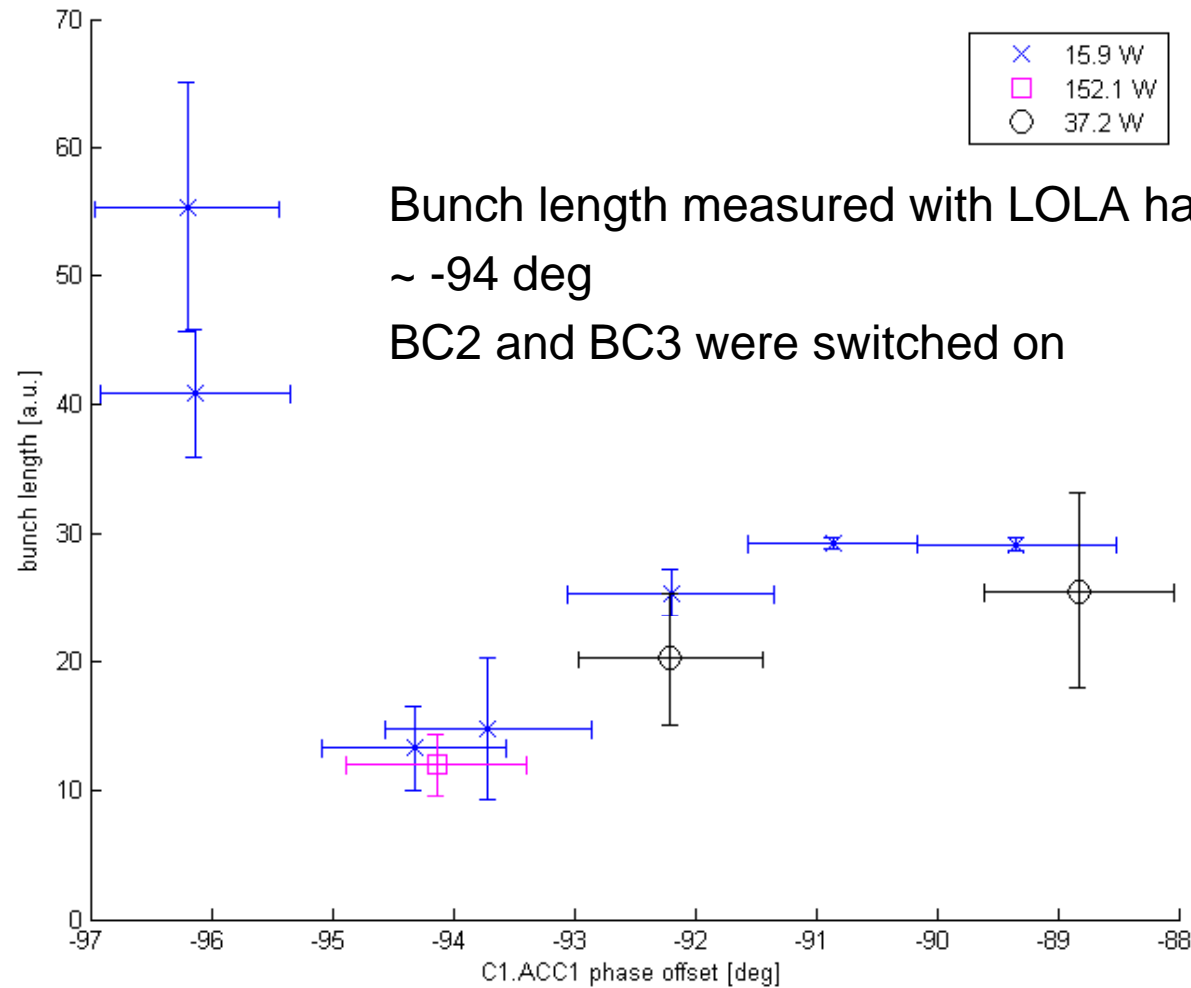

Microbunching instability

Longitudinal Phase Space @ LOLA

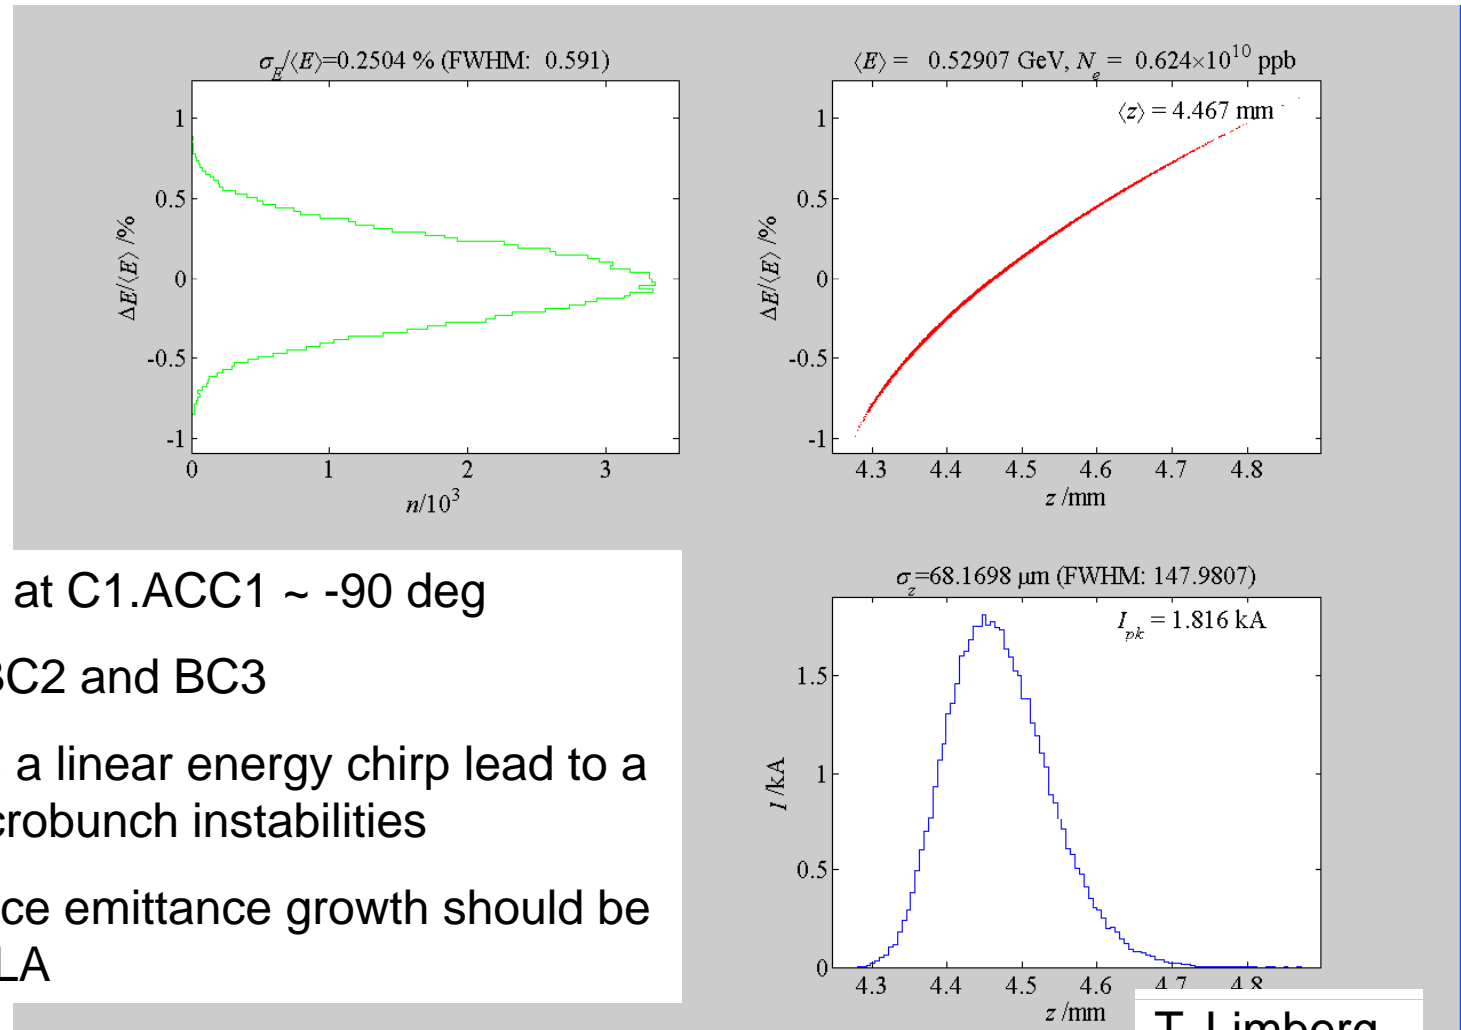

Velocity bunching at C1.ACC1 ~ -90 deg

Compression in BC2 and BC3



1.8kA in BC3 with a linear energy chirp lead to a strong gain of microbunch instabilities

Corresponding slice emittance growth should be observable at LOLA

T. Limberg

Bunch is pre-compressed with velocity bunching(C1.ACC1 ~90deg)
Off-crest acceleration in C2-C8.ACC1 to induce compression in BC2 and BC3
C1.ACC1 is excluded from the RF-Feedback – strong shot-to-shot fluctuations

Qualitative observation of microbunch instabilities

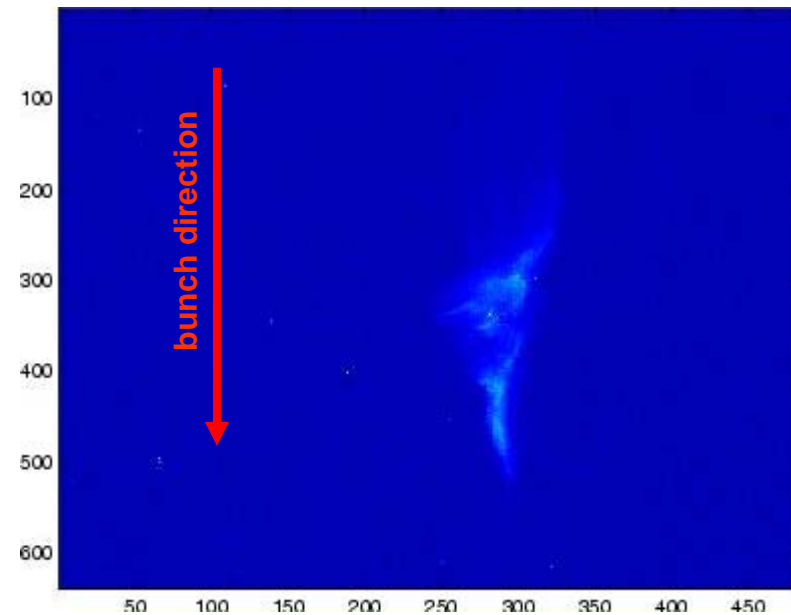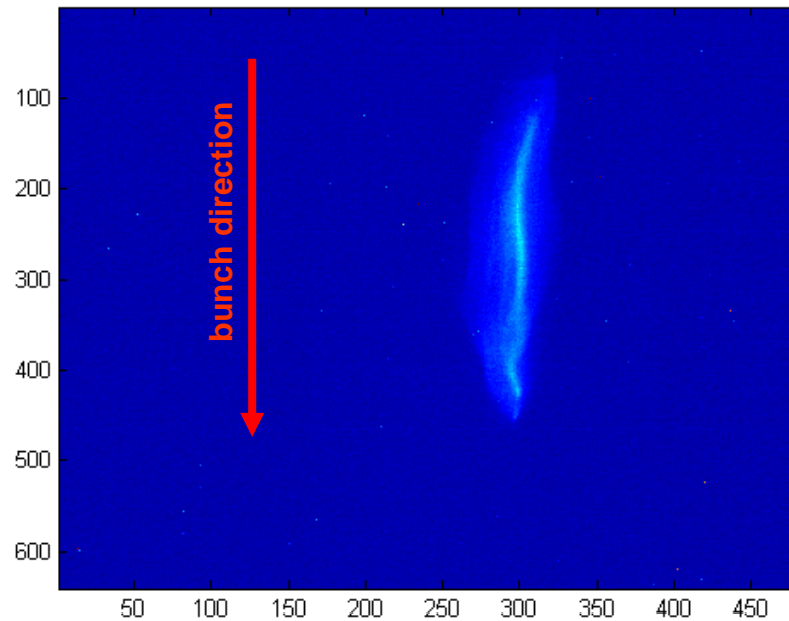

- Velocity bunching demonstrated at FLASH
- Indirect methods as well as compression monitors, streak camera, and transverse deflecting structures were used
- Indications for observation of microbunch instabilities

Next Steps:

- Detailed and dedicated studies on microbunch instabilities
(=> beamtime request)

Thank you for your Attention
and
Special thanks to V. Ayvazyan, M. Huening,
O. Grimm, and K. Klose.


- New Gun (thanks to Jang-Hui Han)
-10k particles, Nrad=24, Nlong=64

Emittance optimised with
Solenoid field of $B=0.165\text{T}$

$Q=0.5\text{nC}$

initial bunch length = 1.5mm

ACC1.C1 Phase [deg]	Bunch length [mm]	emmit. [mm mrad]
-80.0	1.087	2.14
-90.4	0.622	2.29
-96.3	0.183	8.04

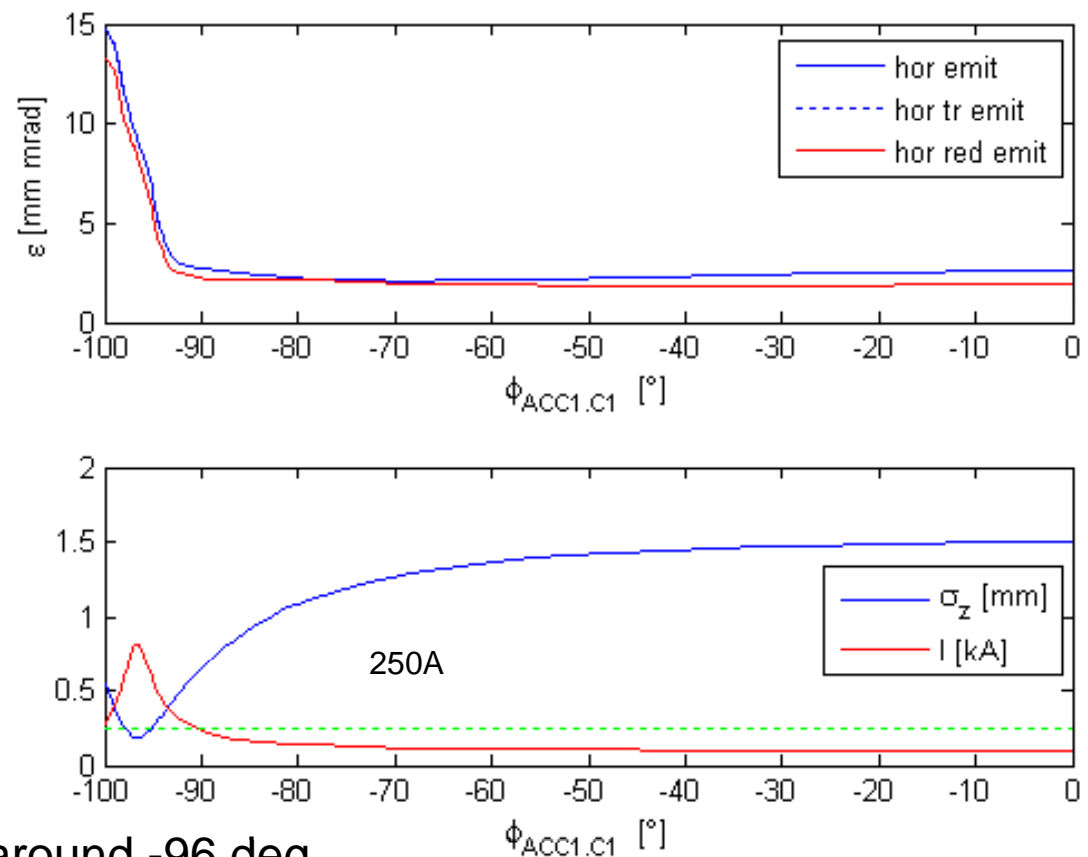

Minimum bunch length expected around -96 deg